

RONDEX-M

The well proven RONDEX series has been given a face-lift. The new chrome-plated front bezels are an optical enhancement and give the actuators an elegant appearance while meeting the highest technical requirements. Moreover, we offer the option to select the colour of the lower part of the front bezel individually, thus, providing innumerable possibilities to design your control panels.

Degree of protection: IP65
Protection class: II



pushbuttons with
illuminating and
labelling option

pilot light head

toggle head

selector head

key actuators



product
design
award

2008



The RONDEX-M series fit the following contact blocks:

Modular contact system

Screw connections
Finger-protected acc. to VBG4
Type series **MT...**



Technical Data:

acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
16(10)A / 10(6)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Modular contact system

Cage-Clamp* technology
Finger-protected acc. to VBG4
Type series **DT...**



acc. to IEC/EN 61058-1
400V~ / 250V~
10(5)A / 16(10)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Modular contact system

Cage-Clamp* quick connection
system
Finger-protected acc. to VBG4
Type series **DS...**



acc. to IEC/EN 61058-1
250V~ / 400V~
16(10)A / 10(5)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



Standard contact blocks

Screw connections
Finger-protected acc. to VBG4
Type series **ET...**




acc. to IEC/EN 60947-5-1
AC15, DC13
acc. to IEC/EN 61058-1
250V~ / 440V~
10(6)A / 6(3)A
Lamp socket: BA9s
Lamp output: max. 2W / 250V



*) CAGE CLAMP is a registered Trademark of WAGO Kontakttechnik GmbH Germany

Mounting depth dimensions

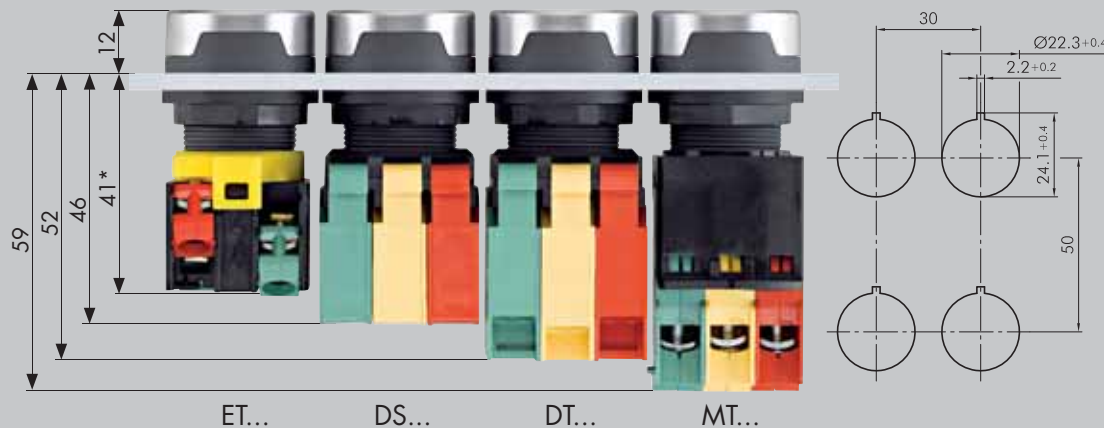

*) illuminated pushbutton 50 mm